



# goldpoint LEVEL CONTROLS

## Goldpoint Selector Switches

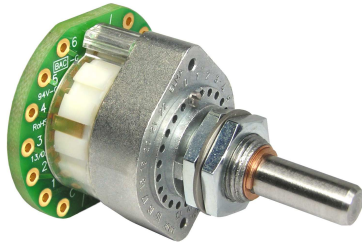


Single deck

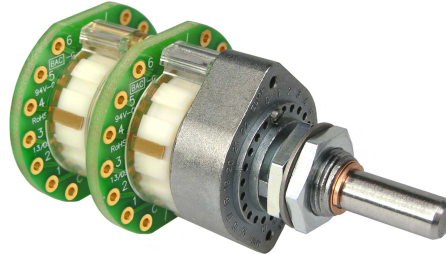


Dual deck

- Goldpoint selector switches were designed for high quality audio applications. They are also easier to use because each switch position is clearly labeled "1, 2, 3", etc. *on both sides of the PC boards*, and the common (pole) connections are clearly labeled "C".
- 4 different circuit configurations are available, all with **30 degree switching angles**:

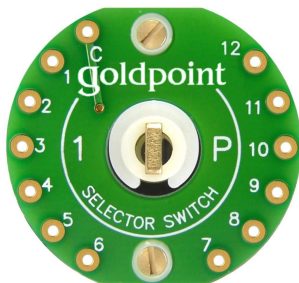

**1P**

1 Pole (1 circuit),  
and up to 12 Positions  
(per deck)

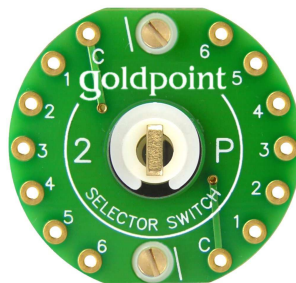


**2P**

2 Pole (2 circuits),  
and up to 6 Positions  
(per deck)






**3P**

3 Pole (3 circuits),  
and up to 4 Positions  
(per deck)

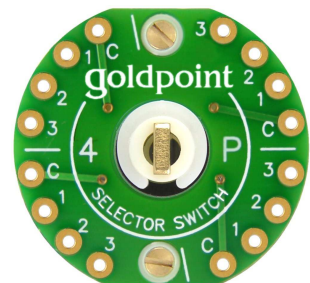


**4P**

4 Pole (4 circuits),  
and up to 3 Positions  
(per deck)

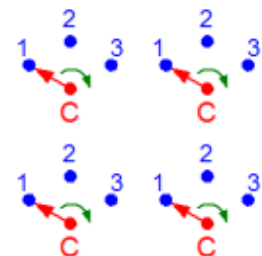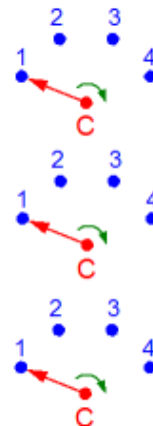

## Determining Part Numbers

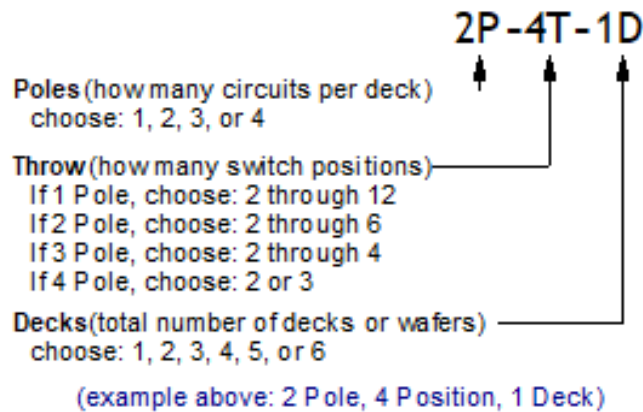

Other part number examples:

**1P-8T-1D** = 1 Pole, 8 Positions, 1 Deck

**2P-6T-1D** = 2 Pole, 6 Positions, 1 Deck

**3P-4T-1D** = 3 Pole, 4 Positions, 1 Deck


**4P-3T-1D** = 4 Pole, 3 Positions, 1 Deck

**2P-5T-3D** = 6 Pole, 5 Positions, 3 Decks  
(2 Poles per deck)

**4P-3T-4D** = 16 Pole, 3 Positions, 4 Decks  
(4 Poles per deck)

## Stop Screw Locations

- A second "Stop Screw" is used to set (or change) the maximum number of switch positions. Never move the first stop screw (the one installed at index position "0").

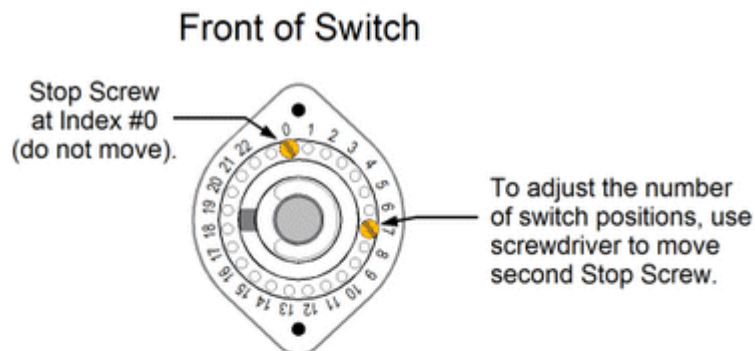

| # of Switch Positions | Move Second Stop Screw to Index # |
|-----------------------|-----------------------------------|
| 2                     | 3                                 |
| 3                     | 5                                 |
| 4                     | 7 (shown)                         |
| 5                     | 9                                 |
| 6                     | 11                                |
| 7                     | 13                                |
| 8                     | 15                                |
| 9                     | 17                                |
| 10                    | 19                                |
| 11                    | 21                                |
| 12                    | 23                                |

## Dimensions

